Rev. No	Revision note	Date	Signature	Checked

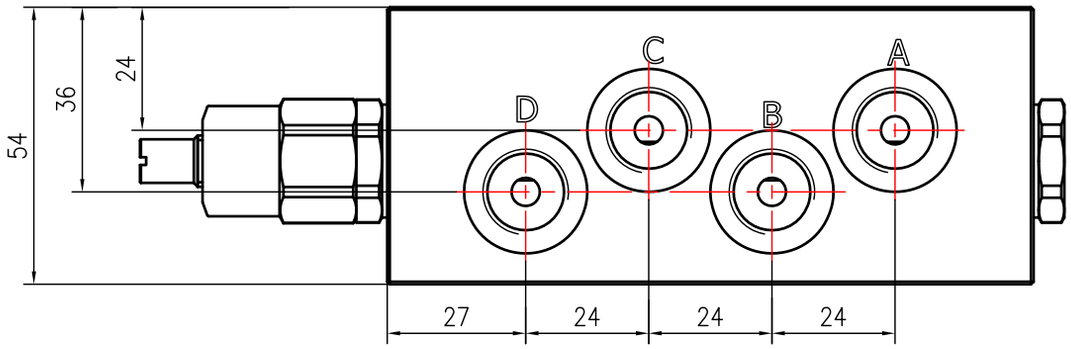

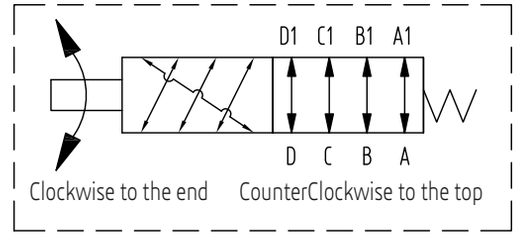

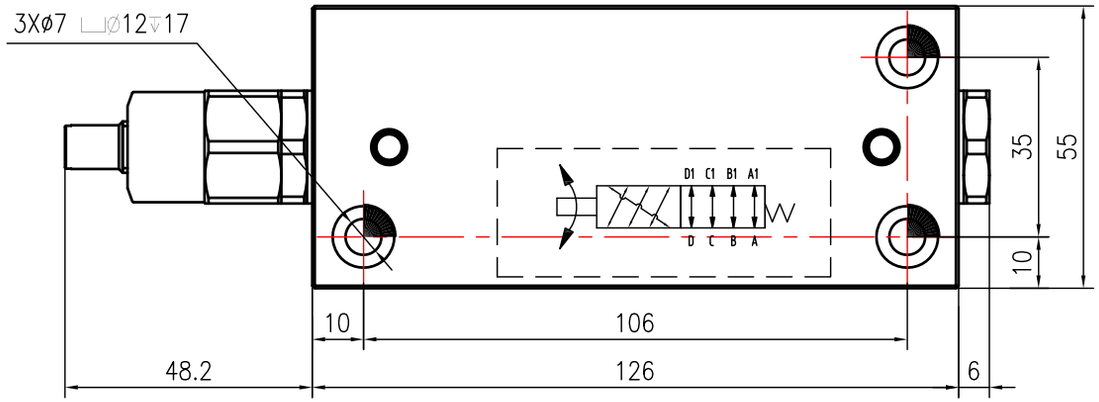

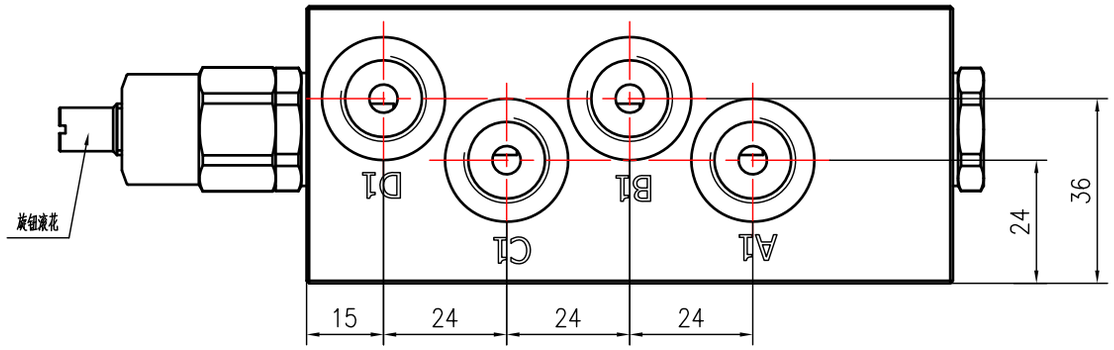

Technical Parameters:

1. Rated pressure: 150Bar, rated flow: 25L/Min;
2. Operating temperature range: -20°C-+90°C;
3. Use cleanliness range: within NAS level 9;
4. All external threaded interfaces: G3/8 DIN 3852.
5. Turn clockwise to the end to switch mode. You can turn it directly by hand.
6. The surface of the valve body is zinc-nickel alloy plated

REV	ALTERATION	DATE	DESIGNED	APPROVED	NPCR
A					

UNLESS OTHERWISE STATED ALL DIMENSIONS IN MM
TOL. - LINEAR: ±0.2 - ANGULAR: ±0.1

DESIGNED		STANDARD	
COLLATED		APPROVED	
CHECKED		MATERIAL/ HEAT	
TECHNICS		PASS	

THM HYDRAULICS

THM HUADE HYDRAULICS PVT LTD
EMAIL: sales@thmhuade.com, salesho@thmhuade.com

SERIES : 2 position 8 way switching valve

PRODUCT UID: T014511276

MATERIAL:	WEIGHT:	SCALE:	DWG NO.:	I / NO.: