Rev. No	Revision note	Date	Signature	Checked

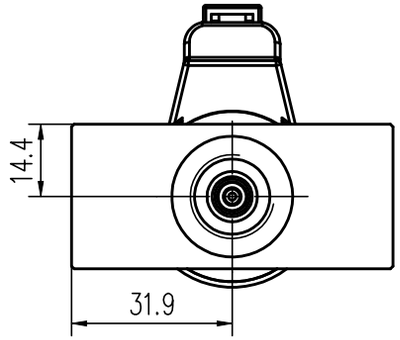



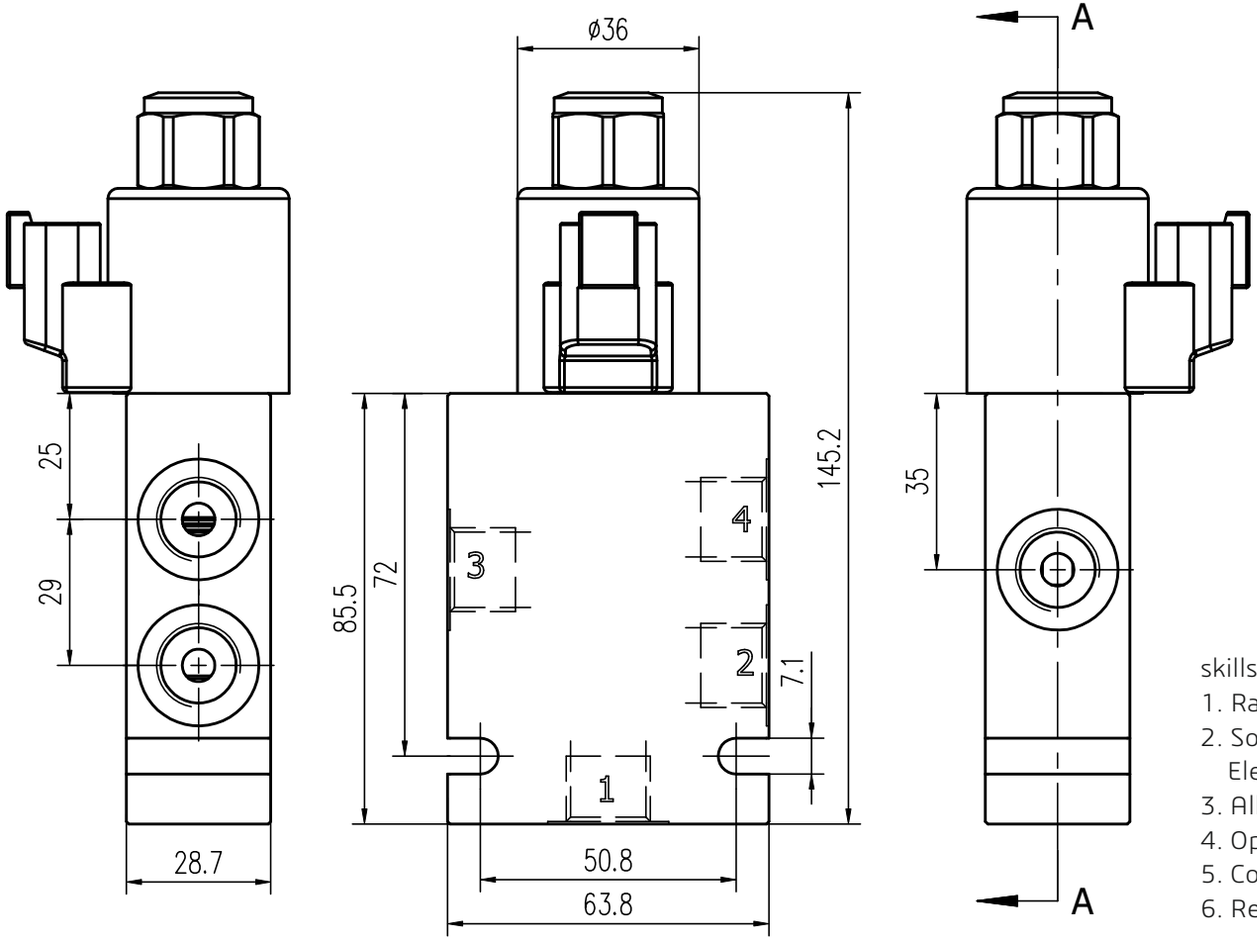

skills requirement

1. Rated flow: 20L/Min: Rated pressure: 350Bar
2. Solenoid valve voltage: DC27V±15%:
   Electrical sow head: DT04-2P. Line drawing power: 25W
3. All external oil ports: G3/8 DIN3852
4. Operating oil temperature range: -20°C-+90°C
5. Comprehensive treatment of valve body surface design
6. Required working oil cleanliness: NAS level 7

REV	ALTERATION	DATE	DESIGNED	APPROVED	NPCR
A					

UNLESS OTHERWISE STATED ALL DIMENSIONS IN MM
TOL. - LINEAR: ±0.2
- ANGULAR: ±0.1

DESIGNED		STANDARD	
COLLATED		APPROVED	
CHECKED		MATERIAL/ HEAT	
TECHNICS		PASS	

THM HYDRAULICS

THM HUADE HYDRAULICS PVT LTD
EMAIL: sales@thmhuade.com, salesho@thmhuade.com

SERIES : Solenoid Valve

PRODUCT UID: T014511277

MATERIAL:	WEIGHT:	SCALE:	DWG NO.:	I / NO.: