Rev. No	Revision note	Date	Signature	Checked

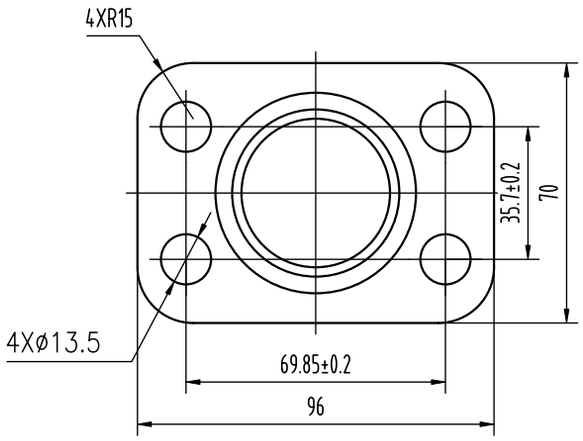

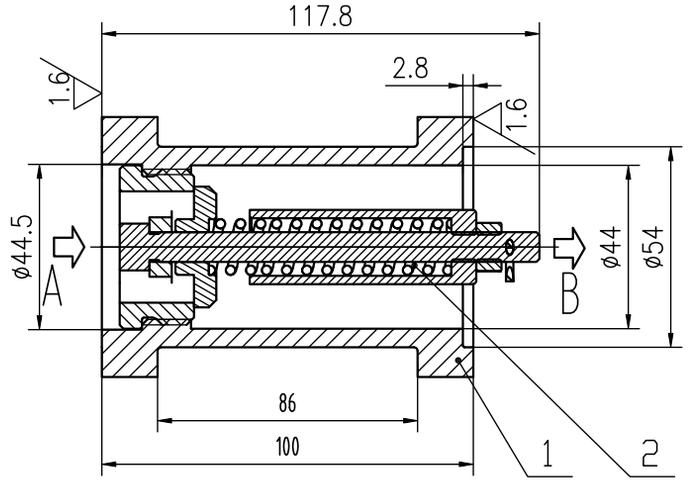

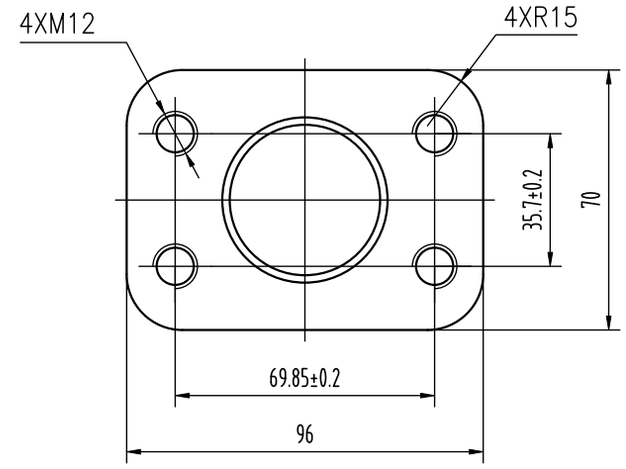

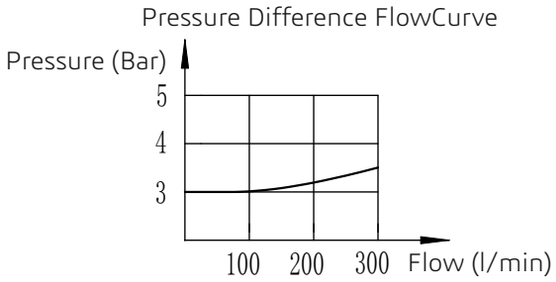

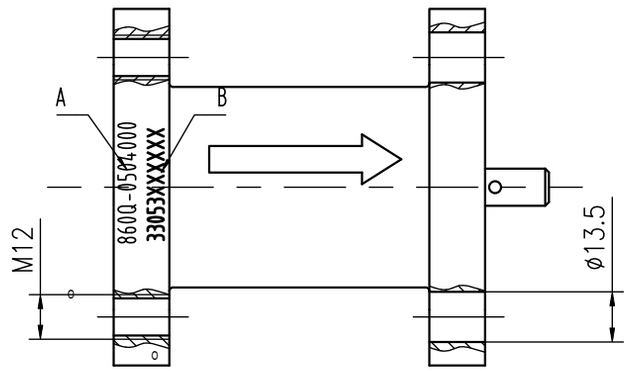

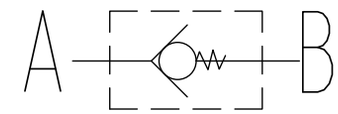

Skill Requirement:

1. Back pressure valve set opening pressure: 0.3MPa
2. All hydraulic components must be cleaned and blown clean before assembly.
3. Test according to test standards. Overall packaging after testing
4. Laser marking the opening pressure on the adjusting screw is 3
5. The valve body needs to be marked, and the customer product drawing number is printed at

A.Mark the customer parts identification number at B, in accordance with THMstandards

Technical Parameters:
Flow Rate: 300 l/min
Opening pressure: 3 bar

REV	ALTERATION	DATE	DESIGNED	APPROVED	NPICR
A					

UNLESS OTHERWISE STATED ALL DIMENSIONS IN MM
TOL. - LINEAR: ±0.2
- ANGULAR: ±0.1

DESIGNED		STANDARD	
COLLATED		APPROVED	
CHECKED		MATERIAL/ HEAT	
TECHNICS		PASS	

THM HYDRAULICS

THM HUADE HYDRAULICS PVT LTD
EMAIL: sales@thmhuade.com, salesho@thmhuade.com

SERIES : Back Pressure Valve

PRODUCT UID: T014511279

MATERIAL:	WEIGHT:	SCALE:	DWG NO.:	I / NO.: