Rev. No	Revision note	Date	Signature	Checked

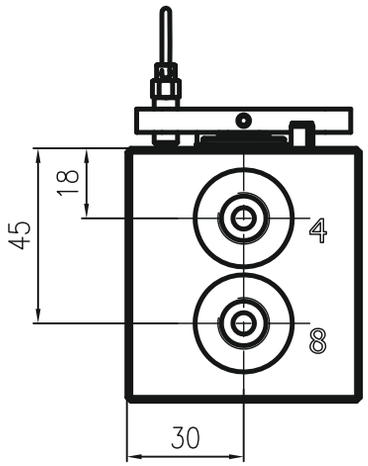

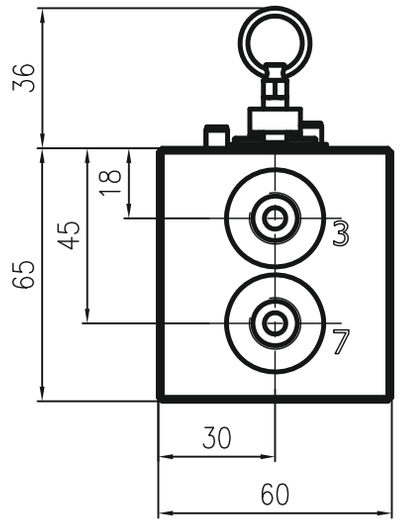

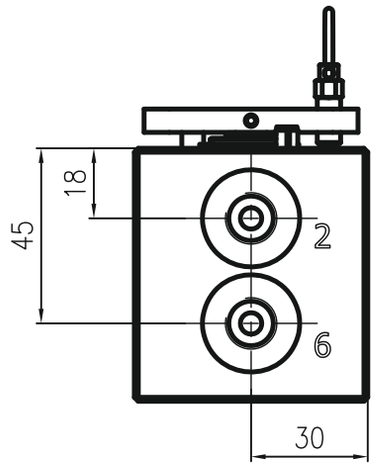

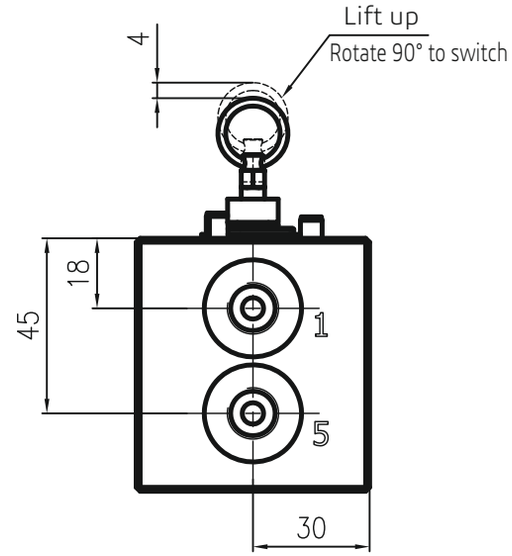

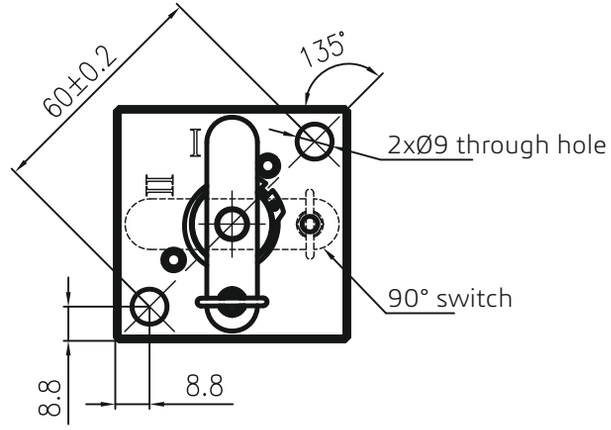

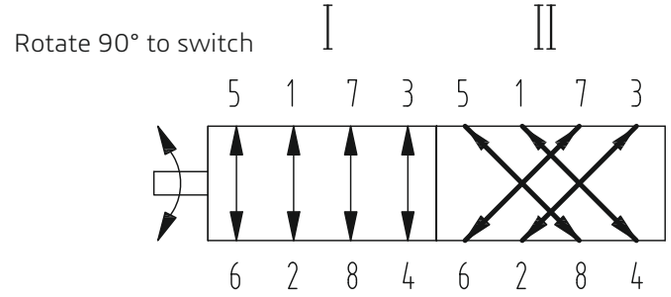

Technical Parameters

1. Rated pressure: 10MPa;
2. Rated flow: 20L/min;
3. Oil port form: all DIN 3852G;
4. Operating oil temperature: -20°C-+90°C;
5. The surface of the valve body is plated with blue and white zinc.

REV	ALTERATION	DATE	DESIGNED	APPROVED	NP/CR
A					

UNLESS OTHERWISE STATED ALL DIMENSIONS IN MM
TOL. - LINEAR: ±0.2
- ANGULAR: ±0.1

DESIGNED		STANDARD	
COLLATED		APPROVED	
CHECKED		MATERIAL/ HEAT	
TECHNICS		PASS	

THM HYDRAULICS

THM HUADE HYDRAULICS PVT LTD
EMAIL: sales@thmhuade.com, salesho@thmhuade.com

SERIES : 2 way 8 switching valve

PRODUCT UID: T014511291

MATERIAL:	WEIGHT:	SCALE:	DWG NO.:	I / NO.: