


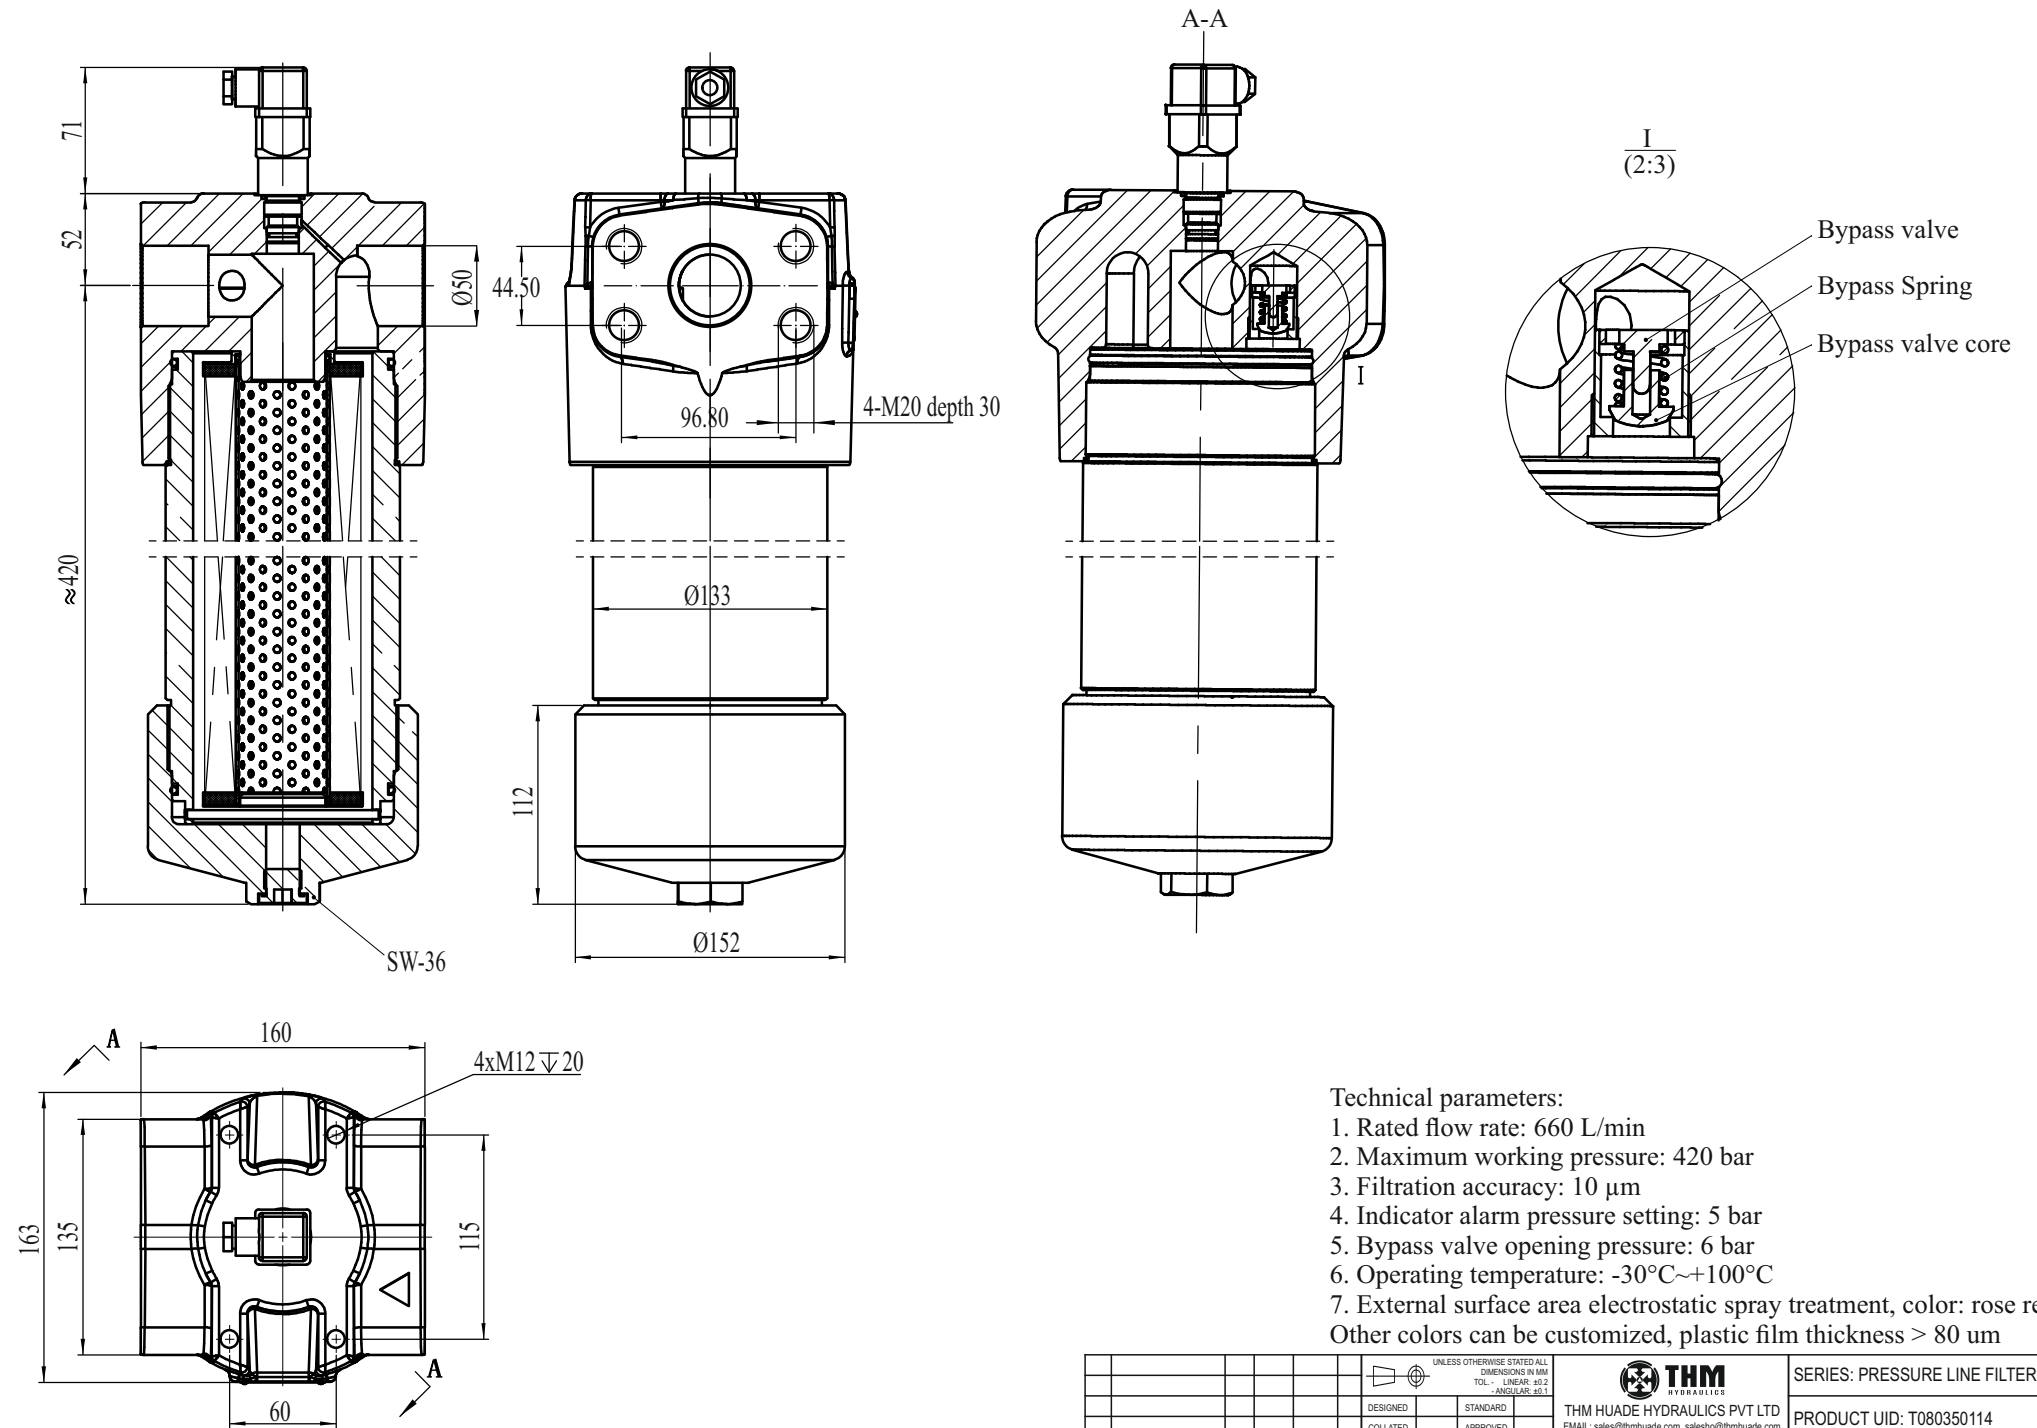

Technical parameters:

1. Rated flow rate: 660 L/min
2. Maximum working pressure: 420 bar
3. Filtration accuracy: 10 μm
4. Indicator alarm pressure setting: 5 bar
5. Bypass valve opening pressure: 6 bar
6. Operating temperature: $-30^{\circ}\text{C}\sim+100^{\circ}\text{C}$
7. External surface area electrostatic spray treatment, color: rose red,
Other colors can be customized, plastic film thickness $> 80\ \mu\text{m}$

[illegible]